
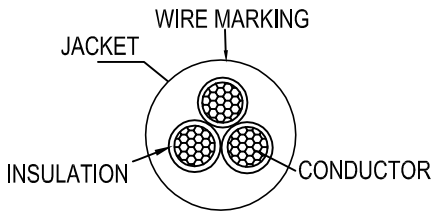

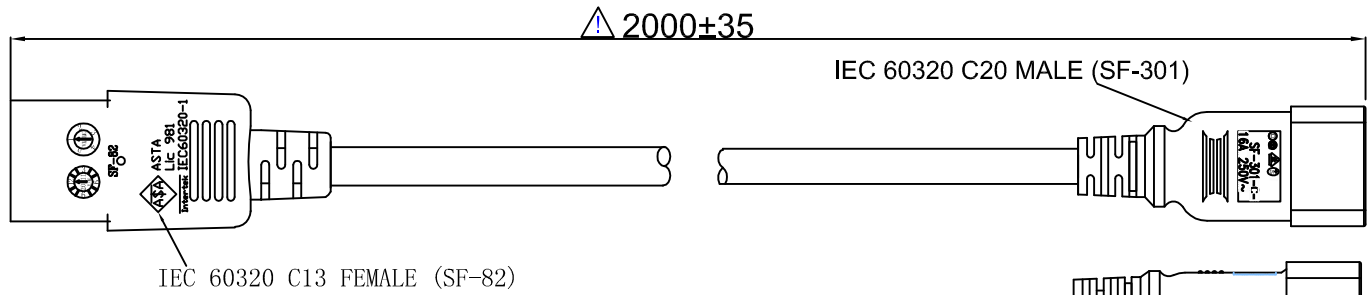



ROHS COMPLIANT

PLUG MARKING:

A/0

DATE	REV	DESCRIPTION	BY	CHECK
	A/0			

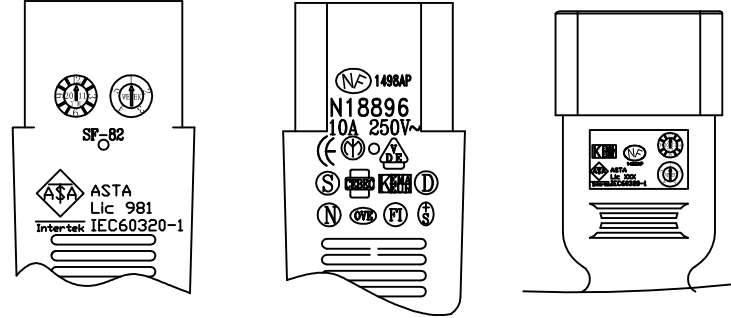

WIRE MARKING: (HOLLOW)		+ 0 0 0 0 KEMA-KEUR CEBEC 972 NF-USE 1345 IEMMEQU H05VV-F 3G1.0MM ² V-75 300/500V ORDINARY DUTY N SW17436						
Conductor		Insulation			Jacket		Overall diameter	
mm ²	Resistance maximum (≤)	Min.Thick	Diameter	Length of Lay	Min.Thick	AVG.Thick		
1.0 (32/0.190)	at 20°C, 19.5ohms/km	0.44mm	2.5±0.1mm	130 ↓ mm	0.58mm	0.8mm	7.0±0.1mm	
(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)								

- ELECTRIC TESTING:**
- 100% OPEN & SHORT TESTING .
 - VOLTAGE RATING: AC ≥ 2000V/S
 - PLUG IEC 60320 C13 FEMALE (SF-82) : 250V 10A
 - PLUG IEC 60320 C20 MALE (SF-301) RATED POWER: 250V 16A
 - WIRE: H05VV-F 3*1.0 RATED VOLTAGE: 300/500V
 - COLOR: BLACK

PAGE	1/1					
Unless specified on the drawing, tolerances are per the follows: X ± 1 .XX ± 0.2 .XX ± 0.05		DESCRIPTION	H05VV-F3G1.0 SF-82+SF-301			
3RD		CUSTOMER NAME	CUSTOMER NO.			
		CUSTOMER PART NO.	AK5026	DRAW	DHY	DATE 2011/10/25
		SCALE	CHECK	wuxiao	DATE	2011/10/25
		UNIT	MM	APPROVAL	DATE	
		PATH NAME	//D//			