


NOTE:ALL MATERIAL ARE RoHS COMPLIANT

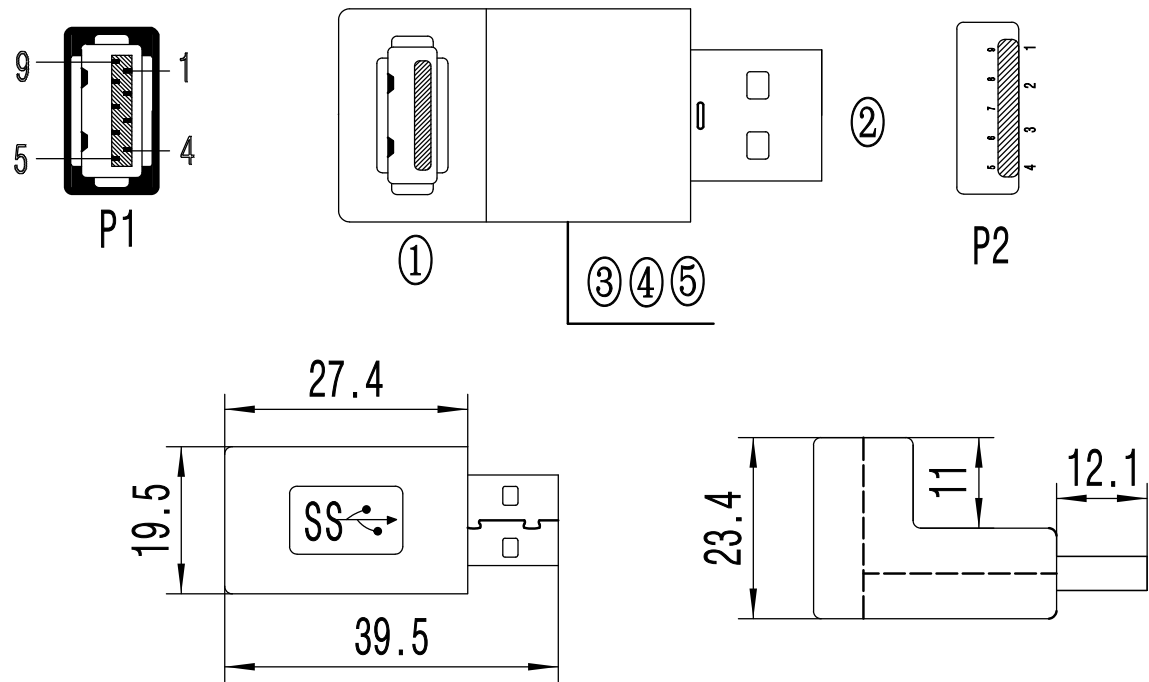

PIN OUT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
SHELL	SHELL

Electrical tests:

1. 100% open and short test.
2. Conductor resistance:5 OHM.
3. Insulation resistance:5M OHM AT 300V DC.

2. Conductor resistance:5 OHM.					ENG: King	
3. Insuation resistance:5M OHM AT 300V DC.						
⑤	45P PVC COLOR:BLACK	LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	ANGLE TOLERANCE:	PRODUCT DESCRIPTION:		CHECKED:
④	PE white diaphanous		X° ± 3°	USB 3.0 A/F-A/M 270°		
③	Electronic wire 7*0.12MM		UNIT: MM	PRODUCT NO:		APPRVED:
②	USB 3.0 A male nickle plating			PAGE: 1/1		
①	USB 3.0 A female nickle plating					